




MA/MAC Stainless Steel Cylinder With Cushioning

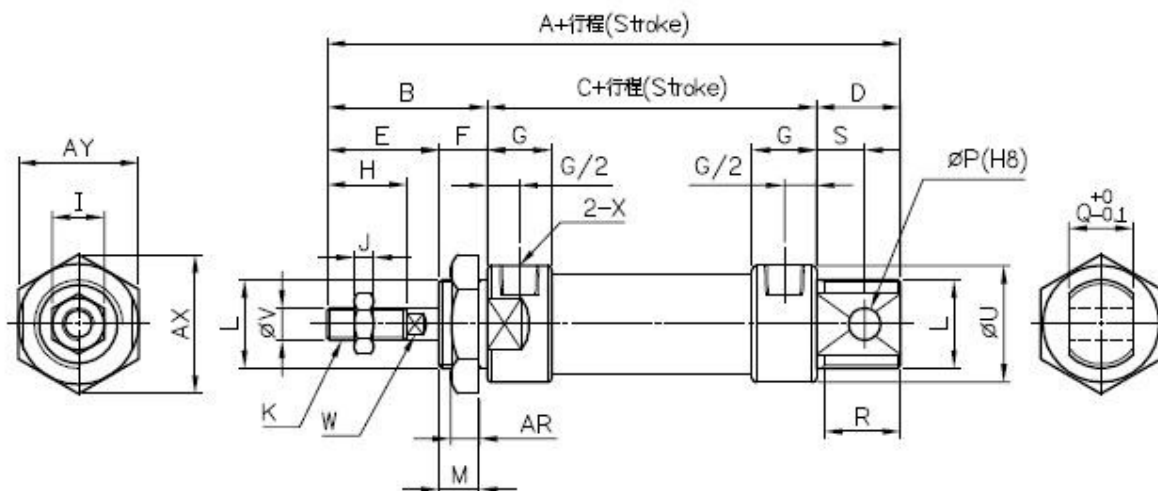


Dia	A	B	C	D	E	F	G	H	I	J	K
16	114	38	60	16	22	16	10	16	10	5	M6*1.0
20	137	40	76	21	28	12	16	20	12	6	M8*1.25
25	141	44	76	21	30	14	16	22	17	6	M10*1.25
32	147	44	76	27	30	14	16	22	17	6	M10*1.25
40	149	46	76	27	32	14	22	24	17	7	M12*1.25

Dia	L	M	P	Q	R	S	U	V	W	X	AR	AX	AY
16	M16*1.5	14	6	12	14	9	21	6	5	M5*0.8	6	25	22
20	M22*1.5	10	8	16	19	12	27	8	6	G1/8	7	33	29
25	M22*1.5	12	8	16	19	12	30	10	8	G1/8	7	33	29
32	M24*2.0	12	10	16	25	15	35	12	10	G1/8	8	37	32
40	M30*2.0	12	12	20	25	15	41.6	16	14	G1/4	9	47	41



MA 6432 ISO Aluminum Barrel Cylinder

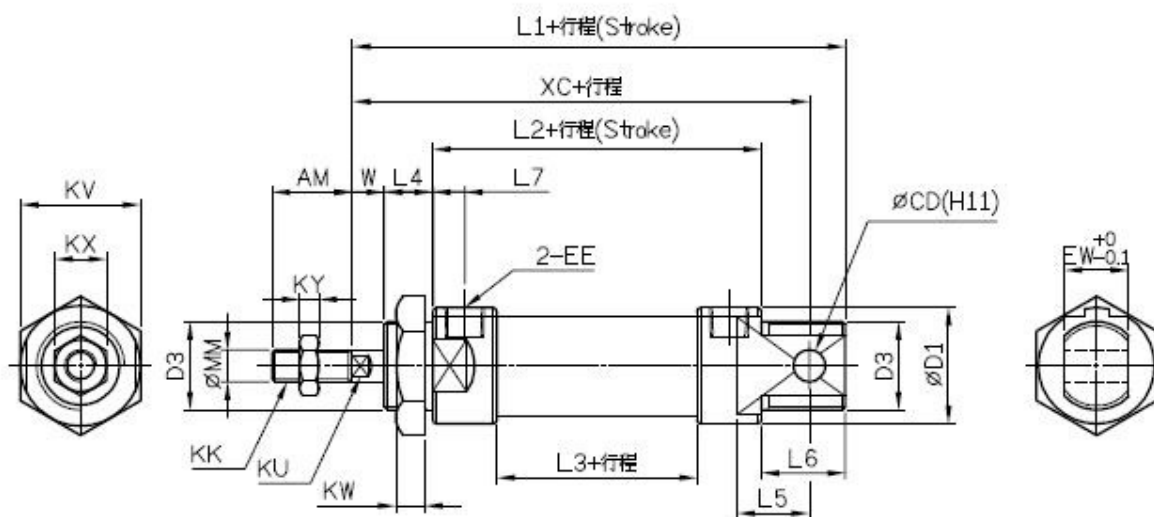


Dia	AM	D1	CD	D3	L1	L2	L3	L4	L5	L6	L7
16	16	20	6	M16*1.5	90	51	31	17	9	17	5
20	20	27.5	8	M22*1.5	111.5	67.5	37	20	12	20	7.6
25	22	27.5	8	M22*1.5	119.5	69.5	37.5	22	12	22	8
32	22	37	10	M27*2.0	138	85	49	20	13.5	22	9
40	24	45	10	M33*2.0	138	85	49	20	13.5	22	9
50	23	53	12	M36*2.0	156	95	49	25	16	27	12

Dia	KK	KU	KV	KW	KX	KY	MM	EW	XC	EE	W
16	M6*1.0	-	24	8	10	5	6	12	81	M5*0.8	5
20	M8*1.25	7	32	8	13	4	8	16	95	G1/8	4
25	M10*1.25	9	32	8	17	6	10	16	104	G1/8	6
32	M10*1.25	10	35	9.5	17	6	12	22	119.5	G1/8	6
40	M12*1.25	14	41	9.5	22	8	16	26	124.5	G1/8	8
50	M14*1.5	14	46	11	19	8	16	20	145	G1/4	9



MA 6432 ISO Stainless Steel Cylinder With Cushioning

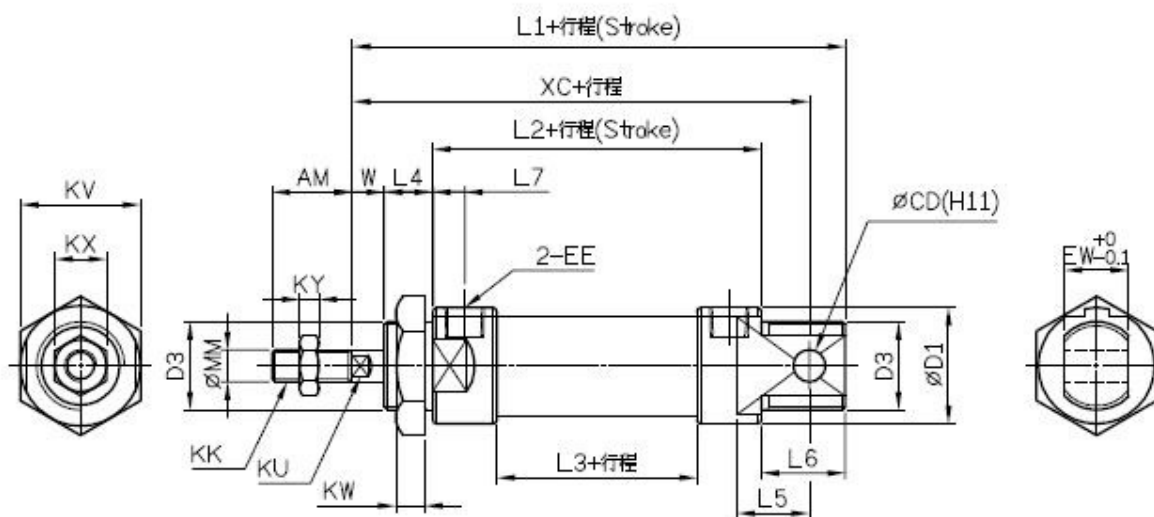

Dia	AM	D1	CD	D3	L1	L2	L3	L4	L5	L6	L7
16	16	20	6	M16*1.5	90	51	31	17	9	17	5
20	20	27.5	8	M22*1.5	111.5	67.5	37	20	12	20	7.6
25	22	27.5	8	M22*1.5	119.5	69.5	37.5	22	12	22	8
32	22	37	10	M27*2.0	133	83	47.5	20	13.5	22	9
40	24	45	10	M33*2.0	138	85	49	20	13.5	22	9

Dia	KK	KU	KV	KW	KX	KY	MM	EW	XC	EE	W
16	M6*1.0	-	24	8	10	5	6	12	81	M5*0.8	5
20	M8*1.25	7	32	8	13	4	8	16	95	G1/8	4
25	M10*1.25	9	32	8	17	6	10	16	104	G1/8	6
32	M10*1.25	10	35	9.5	17	6	12	22	119.5	G1/8	6
40	M12*1.25	14	41	9.5	22	8	16	26	124.5	G1/8	8